

SKU: AP5407

- 🇬🇧 VOLT Pneumatic Pressure Lubricator
- 🇩🇪 VOLT pneumatische Schmier
- 🇪🇸 VOLT neumática Lubricador
- 🇫🇷 VOLT pneumatique Lubricator de pression

Valves[™]
O N L I N E

- 1/8" - 1" Pneumatic Lubricator with Housing
- 1/8" - 1" Pneumatische Öler mit Gehäuse
- 1/8" - 1" neumático lubricador con Vivienda
- 1/8" - 1" pneumatique Lubricateur avec logement

Pneumatic Lubricator



- Removable Cover
- Economic
- Adjustable Knob
- Rugged

Description

Normally pneumatic equipment does not require additional lubrication. However in specific conditions where lubrication needed this lubricator bowl is used. Filled with Oil, air is passed through the lubricator where it automatically nebulises the oil via a venturi, which deposits the oil at pre-determined levels. The lubricator should be ideally mounted as close as possible to the components which require lubrication.



Description

Fully automatic nebulising oil lubricator, housed in a rugged bowl. Easy to fill and adjust, with quick release bowl cover. Sight glass indicates oil level.



Beschreibung

Vollautomatische Vernebelungs Öl Öler , in einem robusten Schale untergebracht . Einfach zu füllen , und stellen Sie , mit Schnellschüsseldeckel. Schauglas zeigt den Ölstand .



description

Lubrificateur nébulisation entièrement automatique , logé dans un bol robuste . Facile à remplir et à régler, avec la couverture de presse de bol rapide. Verre Sight indique le niveau d'huile .




description


Lubrificateur nébulisation entièrement automatique , logé dans un bol robuste . Facile à remplir et à régler, avec la couverture de presse de bol rapide. Verre Sight indique le niveau d'huile .

-  VOLT Pneumatic Pressure Lubricator
-  VOLT pneumatische Schmier
-  VOLT neumática Lubricador
-  VOLT pneumatique Lubricator de pression



Pneumatic Lubricator

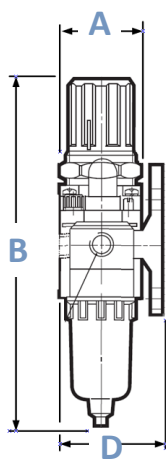


FM-20

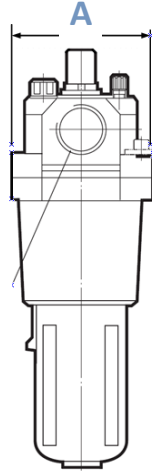

FM-30

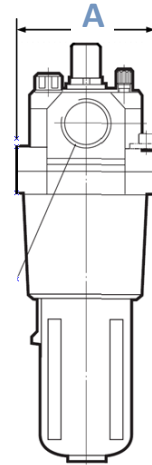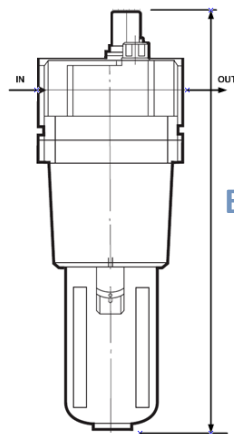


FM-40

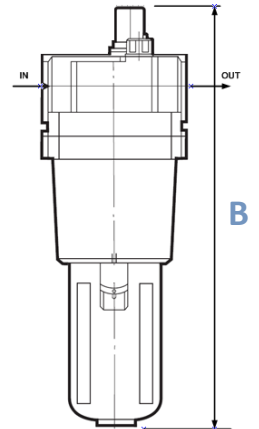


Model	Port Size	A	B
FM-20-01-L	1/8"	40	143
FM-30-02-L	1.4"	53	166
FM-40-03-L	3/8"	70	214
FM-40-04-L	1/2"	70	214
FM-50-06-L	3/4"	70	227
FM-50-10-L	1"	78	227.5

SPECIFICATIONS

Max. Supply Press.	220psi
Max. Operating Pressure	145 psi
Ambient & Media Temp.	60°C
Recommended Oil	5-10 Weight Hydraulic Oil
Bowl Material	Polycarbonate
Metal Bowl Guard	Zinc

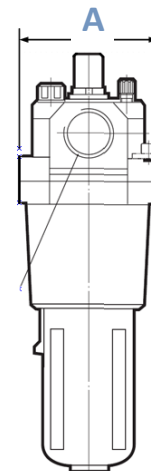

FM-50

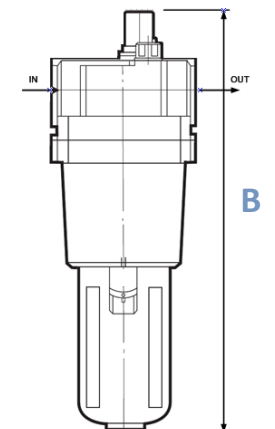

Model	Port Size	Flow Rate L min	Weight
FM-20-01-L	1/8"	500	0.23
FM-30-02-L	1.4"	1700	0.23
FM-40-03-L	3/8"	3000	0.32
FM-40-04-L	1/2"	3000	0.32
FM-50-06-L	3/4"	5000	1.1
FM-50-10-L	1"	5000	1.5